



NNA-2WG8L

2WAN + 8LAN Gigabit Access Controller

More information:
WWW.NIVEOPROFESSIONAL.COM
INFO@NIVEOPROFESSIONAL.COM



Product Specification

Introduction

The Niveo Professional NNA-2WG8L Secure WLAN Controller with built-in 2,000 local accounts, 2,000 on-demand accounts, is an ideal security solution for small-to-medium scale WLAN deployments, including enterprises, campuses, hotels, airport terminals, and MDUs/ MTUs. The NNA-2WG8L integrates “secure access control”, “visitor account provisioning”, “flexible accounting and billing”, and “centralized WLAN management” into one box to provide simplified manageability and instant mobility. With more powerful hardware, NNA-2WG8L is capable of centrally managing 60 Layer 2/ Layer3 access points to cover a wider service area in a small-to-medium network.

Secure Business Networking

NNA-2WG8L is suitable for business in managing their wired and wireless network access uniformly. The network access of users from different departments and the access of guests can be segregated in different Service Zones. When needed, NNA-2WG8L's Local, Site-to-Site and Remote VPN tunnels can be used to further secure the information flows for business. Mobile workers on the road or home-based teleworkers can securely access the office network through remote VPN tunnels.

College Dormitories, Apartments or Hotels Networking

For college dormitories, apartments or hotels who want to cater for their tenants' Internet access needs, NNA-2WG8L makes it easy to manage new tenant registrations and share bandwidth equally among tenants. Also, it is convenient to set up NNA-2WG8L to offer wireless Internet service at small-to-medium events, such as conventions, trade shows, and student spring break gatherings

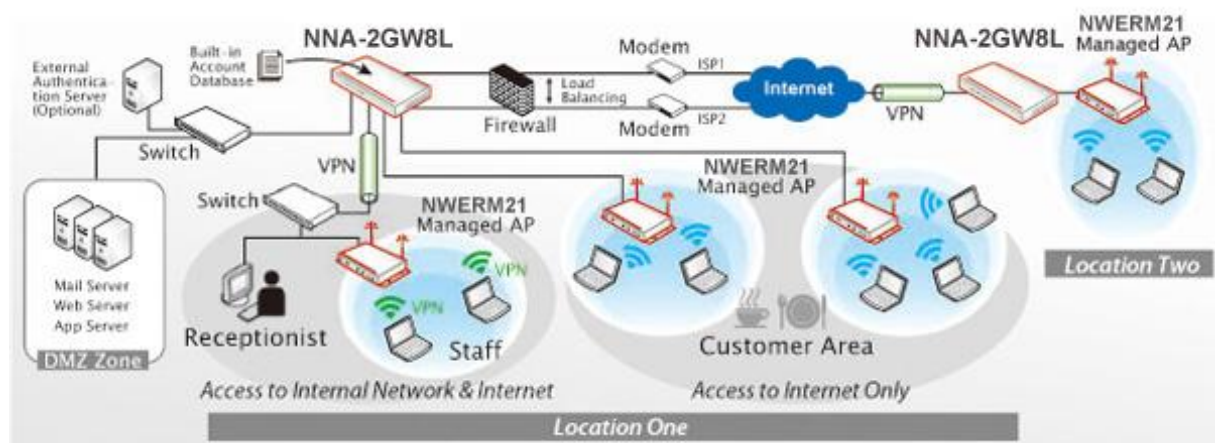


Fig.1. NNA-2WG8L in a Business Headquarter



Secure corporate network over the internet

With the NNA-2WG8L, businesses can easily bridge multiple offices under a centrally managed single internal network. VPN solutions from other service providers are no longer necessary. NNA-2WG8L with NWERM21 can service distributed network locations as if under the same internal network via secure tunneling technology.

Hotel with Property Management System (PMS)

For **hotels using Property Management System (PMS)** such as Micros Fidelio/Opera, NNA-2WG8L even enables Internet access charges to be incorporated into the room bill [1]. Moreover, customers are able to purchase Internet service in room anytime or at the front counter. With a single account, a hotel guest can log on the Internet **in room through a wired Ethernet port** or enjoy **wireless access** throughout the hotel property. Before the account expires or the quota purchased reaches its limit, the guest who wants to surf the Internet in his/her room does not need to retype the password. NNA-2WG8L stands for the most cost-effective and easy-to-setup Internet Access Controller for hotels. Not only can NNA-2WG8L manage and bill both wireless and in-room wired Internet services for properties that have adopted modern IP network infrastructure, but it works for those who only utilize traditional phone lines coupled with DSLAM and DSL modem equipment to deliver Internet to each room.

[1] NNA-2WG8L is capable of posting Internet access charges to various PMS systems through a 3rd party middleware



Telco's or Large Hotspot Operators Networking

For **Telco's** or **large hotspot operators**, NNA-2WG8L brings in a convenient and economical way to deploy distributed hotspot services. While most of the operators prefer to use external RADIUS servers as authentication database, NNA-2WG8L in this architecture can play the role of a central RADIUS-NAS. For quick deployment, NNA-2WG8L supports two authentication methods: UAM and 802.1X. It is capable of supporting customized web UAM pages uploaded locally as well as external web UAM pages residing on external web servers. Furthermore, the concept of Service Zones of NNA-2WG8L allows one Controller to manage multiple franchised hotspots simultaneously.

In summary, the feature-rich NNA-2WG8L supports **multiple business models** of Internet Access Services - be it for managing wireless or wired clients. It can be configured to fit for private corporations, government agencies, academic campuses, multi-tenant units (MTU), hotels, WISP or telco's hotspot operations.

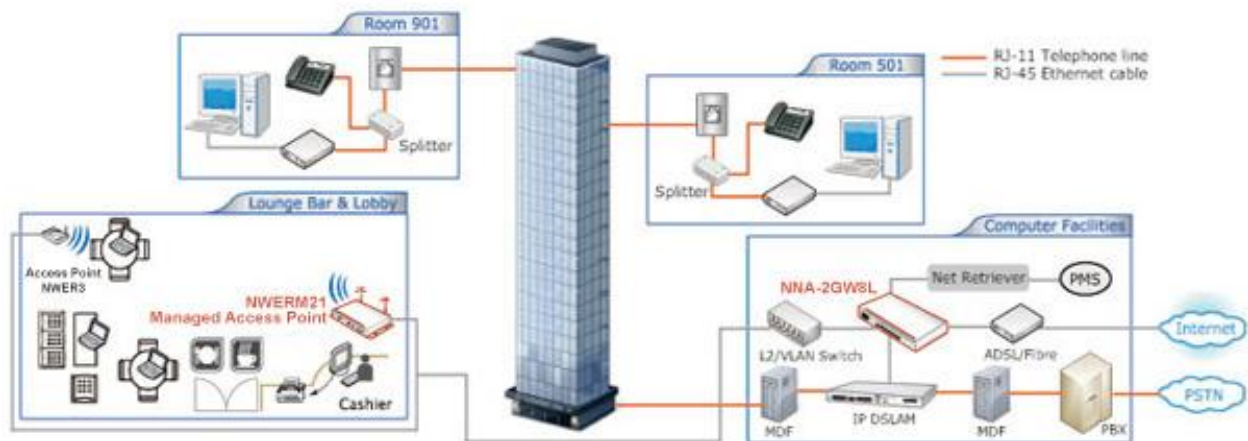


Fig.2. NNA-2WG8L in a Hotel – Capable of integrating with DSLAM and PMS



Features and benefits

Simplified Deployment and Reliable Internet Connection

- Easy to deploy, highly scalable platform allows overlay with existing wired/wireless infrastructure without disruption
- Load balancing and WAN failover enhance bandwidth utilization and provide more reliable Internet connection

Powerful Network Security Capabilities for Enterprise Applications

- Standards-based data encryption: WEP, WPA, WPA2, IEEE 802.1X, and IPSec VPN
- Secure guest and administrator access using web-based login and administration over SSL
- Diverse user authentication methods, including built-in Local and On-demand database; supports external authentication servers including POP3, LDAP, RADIUS, Windows Domain, and SIP registrar.
- Built-in DoS protection keeps malicious hackers from collapsing the network
- Site-to-site VPN tunnels allow branch offices to securely connect with one another and share the same account database

Comprehensive Access Control and User Management

- Role-based access control and policy enforcement offer management of privileges for different user groups
- On-demand account generation provides secure and managed user accounts to visitors
- Service Zone function partitions a physical network into up to 9 virtual networks, each with its own definable access control and group policy profiles. Allows hotspot owners to provide various levels of customized services
- Individual user bandwidth limit enables flexible traffic control for different scenarios

Centralized Access Point (AP) Management

- Centralized remote control and automatic AP discovery
- Management and monitoring of managed APs via web-based administration interface, including AP's system settings, online status, enabling/disabling, reset, and firmware upgrade
- Periodically monitors APs and notifies the administrator of problematic Aps
- Secure tunneled AP management to extend corporate network over the internet.



Flexible Accounting and Easy Billing

- Configurable billing profiles allow operators to customize billing plans for on-demand users
- Support online payment with credit card through Authorize.net, PayPal, SecurePay, and WorldPay

Support for Location-Based Hotspot Services and Customizable UAM Web Pages

- The logical concept of Service Zone allows the Controller to differentiate clients by locations and to provide different user experiences (such as different login pages) and network policies
- When coupling with VLAN switches and DSLAM devices, the Controller can use its Port Mapping feature to tell the location of each client and therefore provide differentiated services. For example, a hotel guest would not need to type in the password again every time when accessing the Internet in room
- By setting up multiple Service Zones and utilizing customized pages or external pages, a single Controller can serve multiple hotspot franchises transparently to the clients

PMS Integration for Hotel Applications

- By interfacing the 3rd party middleware - NetRetriever, the controller is able to post billing information to multiple kinds of hotel PMSs, including Micros Fidelio/Opera, HiRUM, RMS, CMS Hospitality, EzyRez, RoomMaster2000, Charts and etc
- A hotel guest can obtain an Internet access account at check-in counter, or sign up for the Internet access service in room anytime without the help of clerks. With PMS integration, the guest will receive a single room bill
- With a single account, a guest will be able to access the Internet by wire in room or by wireless connection anywhere within the service range of APs connecting to the Controller



Specifications

Networking

- Support NAT or Router mode
- Support Static IP, DHCP, PPPoE mode on WAN interfaces and PPTP (WAN 1 only)
- Choose freely which LAN is authentication-enabled LAN
- Support NAT:
- IP/Port destination redirection
- DMZ server mapping
- Virtual server mapping
- H.323 pass-through
- Supports email service via designated email server
- Built-in with DHCP Server and support DHCP relay
- Support walled garden (free surfing zone)
- Walled Garden Ad List that enables advertisement website links on user login portal page
- Support MAC-address and IP-address pass-through
- Support HTTP Proxy
- Support IP Plug and Play (IP PnP)
- Support configurable static routes
- Contain built-in hardware-based VPN accelerator
- Support dual uplinks, outbound load balancing and failover for more reliable Internet connection
- Support SIP pass-through NAT
- Support Ethernet connection to external terminal servers
- Port location mapping features for working with DSLAM and VLAN switches

System Administration

- Support web-based management user interface
- Provide customizable login and logout portal page
- SSH remote management
- Remote firmware upgrade
- NTP time synchronization
- Menu driven console management interface
- Utilities to backup and restore the system configuration



Monitoring and Reporting

- Status monitoring of on-line users
- IP-based monitoring of network devices
- Uplink (WAN) connection failure alert
- Support Syslog for diagnosis and troubleshooting
- User traffic history logging
- Traffic history report via email to administrator
- Users' session log can be sent to FTP or Syslog server

User Management and Access Control

- Support 2,000 local accounts and 2,000 on-demand accounts
- Provide on-demand accounts for visitors
- Support Local user account roaming
- Authentication methods supported: Local and On-demand accounts, POP3, LDAP, RADIUS, Windows Domain, and SIP authentication
- Single-Sign-On for Windows Domain
- Allow MAC address and user identity binding for local user authentication
- Support MAC Access Control List
- Support auto-expired guest accounts
- Users can be divided into user groups, each user group has its own network properties, including bandwidth, QoS, accessible service zones, and other privileges
- Support QoS and WMM traffic types: Voice, Video, Best Effort and Background
- Each group (role) may get different network policies in different service zones
- Max concurrent user session (TCP/UDP) limit
- A setting for user-idle-timeout
- Configurable user Black List
- Export/Import local users list to/from a text file

Security

- Support local IPSec VPN tunnels
- Support PPTP VPN tunnels
- Support site-to-site VPN tunnels
- Support VPN pass-through (IPSec and PPTP)
- Built-in DoS attack protection



Service Zones

- The network is divided into maximum 9 Service Zones, each defined by a pair of VLAN tag and ESSID
- Each service zone has its own:
 - login portal page
 - authentication options
 - LAN interface IP address
 - DHCP address range
- Each service zone allows access to the selected groups
- Each service zone assigns a network policy to each user group
- WISPr support per service zone

Accounting and Billing

- Support local on-demand and external RADIUS server
- Contain 10 configurable billing plans for on-demand accounts
- Support credit card billing system by Authorize.net, PayPal, SecurePay, and WorldPay
- Provide session expiration control for on-demand accounts
- Provide detailed per-user network traffic history for both local and on-demand user accounts
- RADIUS VSA implementation for volume-based session control using RADIUS server
- Support automatic e-mail to report network traffic history
- Support Net Retriever, the middleware connection to Property Management System (PMS)

AP Management

- Manage multiple types of APs: up to 60 x Niveo NWERM21
- Monitor NWER3 and third party non-integrated AP: up to 100
- Centralized remote management via HTTP/SNMP interface
- Auto discovery for managed APs
- Enable or disable APs easily via user interface
- Templates for managed APs
- Monitoring managed AP for its status, the number of associated clients, and RF information
- Upgrade managed APs centrally, including bulk upgrade
- Rogue AP detection and AP load balancing
- Tunneled AP management over internet for NWERM21



Hardware Specifications

- WAN Ports: 2 x 10/100BASE-TX RJ-45
- LAN Ports: 8 x 10/100BASE-TX RJ-45
- Console Port: 1 x RJ-11
- LED Indicators: 1 x Power, 1 x Status, 2 x WAN, 8 x LAN

Physical and Power

- Power Adapter:
- Input: 100~240 VAC, 50/60 Hz
- Output: 12VDC, 1.5A
- Form Factor: 19" 1U Rack Mount
- Dimensions (W x D x H): 16.9" x 5.9" x 1.7" (430 mm x 150 mm x 43 mm)
- Weight: 3.3 lbs (1.5 kg)

Environment

- Operating Temperature: 0 ~ 40 °C
- Storage Temperature: -20 ~ 65 °C
- Operation Humidity: 5% ~ 95% (Non-condensing)
- Storage Humidity: 5% ~ 95% (Non-condensing)

Certifications

- CE, FCC
- RoHS compliant

Package Contents

- NNA-2WG8L x 1
- CD-ROM (User's Manual and QIG) x 1
- Quick Installation Guide (QIG) x 1
- RS-232 DB9 to RJ-11 Console Cable x 1
- Crossover Ethernet Cable x 1
- Power Adaptor (12VDC, 1.5A) x 1
- Power Cord x 1
- Rack Mounting Bracket (with Screws) x 1

** Specifications subject to change without notice**